


Ensign MEDICINE CABINET




FEATURES/TYPICAL SPECIFICATIONS

- Surface Mount Installation
 - Pre-drilled mounting holes
- Formed and welded steel housing (WB/ST)
 - 24 gauge steel construction with white, heat cured, acrylic paint finish
 - Polished stainless steel trim strips - both sides, top, and bottom on body front
 - 24 gauge galvanized steel top cover
- Sliding Mirror Doors
 - 3/16" thick float glass mirror door with polished edges, 4 sides (2 typical)
 - Clear acrylic door pull (2 typical)
 - Mirror doors slide in gray PVC dual slotted tracks (2 typical / one top & one bottom) snapped into housing
- Incandescent dual light sockets (2 typical) (Uses four 60 watt maximum, medium base, 120V bulbs (I60A) - bulbs not included)
- .White, translucent plastic lens
 - .060 thick high impact polystyrene
 - Ribbed outside surface
- Grounded convenience outlet and on/off switch located top right side of cabinet
- 26 gauge galvanized steel shelf with white, heat cured, enamel paint finish (1 typical)
 - Fixed shelf — removable (FX2)
- Includes installation hardware
- Pallet Quantity = 18 units

Finishes:

Housing: PT01 - Basic White
 Mirror: POL1 - Polished Edge
 Cabinet Trim: SS8-Polished Stainless Steel

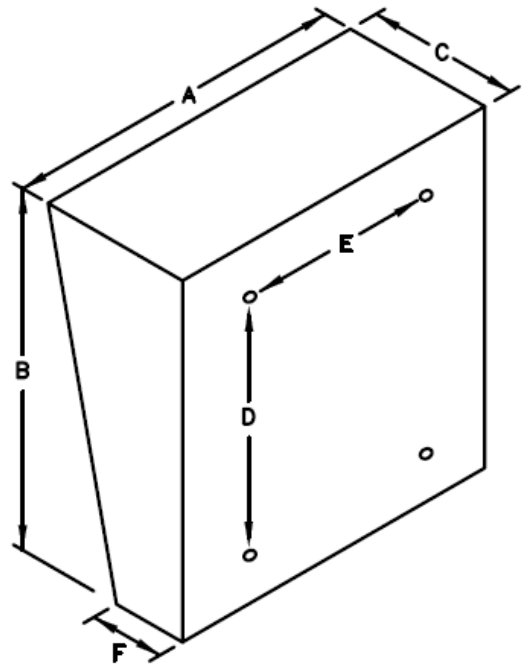

		Dimensions In Inches					
Model #	Description	A	B	C	D	E	F
124LP	MEDCAB 2DR 24X23 SS8 WB/ST	24	23½	8¼	19⅞	15	5½

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date

* All models and material specifications are subject to change or withdrawal without notice.